WESTINGHOUSE

PRODUCT FACTSHEET & SPECIFICATION GUIDE

MODEL: WRF610WA

60CM FIXED RANGEHOOD - WHITE FINISH

Designed for effortless under-cabinet installation, the Westinghouse WRF610WA features a classic painted white canopy, 200 m³/h air extraction capacity, 3 fan speed settings, bright LED cooktop lighting, and convenient dishwasher-safe aluminum mesh grease filters.

200 m³/h	3 Speeds	598 x 500 mm
MAX EXTRACTION CAPACITY	FRONT PUSH BUTTON CONTROL	OVERALL FOOTPRINT

KEY PERFORMANCE FEATURES

Classic White Canopy Finish

Clean, durable white powder-coated finish blends smoothly with traditional and modern white kitchen cabinetry for a neat under-cabinet look.

Energy-Efficient LED Illumination

Low-wattage LED bulb illuminates the cooking surface with clear, direct task lighting while keeping energy consumption low.

Ducted & Recirculating Operation

Flexible configuration options supporting top 120mm ducting for external venting or front-vented recirculating with carbon filters.

Dishwasher Safe Mesh Filters

Multi-layer aluminum mesh filters effectively capture airborne grease particles and unclip easily for effortless dishwasher washing.

TECHNICAL SPECIFICATIONS SUMMARY

FEATURE / PARAMETER	SPECIFICATION DETAILS
Finish & Construction	Powder-Coated Painted White Canopy with Front Recirculation Louvres
Control Interface	Front-Mounted Mechanical 3-Speed Push Button Switches
Acoustic Noise Output	51 dBA (Low Speed) – 63 dBA (Maximum Speed)
Lighting System	Energy Efficient Integrated LED Lamp
Included Accessories	2 x Aluminum Mesh Grease Filters + 120mm Duct Outlet Collar
Electrical Connection	220–240V 50Hz fitted with 10A Standard Plug & Cord

FIXED RANGEHOOD COMPONENT LAYOUT



OPERATING INSTRUCTIONS

- **Power & Fan Speed Control:** Press the front panel button to engage Speed 1 (low for gentle simmering), Speed 2 (medium for general cooking), or Speed 3 (high for intense frying or boiling).
- **Cooktop Lighting:** Press the dedicated lamp button to switch the LED cooktop light on or off independently from fan operation.
- **Cleaning Grease Filters:** Unclip the mesh filters monthly using the quick-release catch. Clean in warm soapy water or wash on a gentle low-temperature dishwasher cycle.
- **Carbon Filter Maintenance:** For recirculating setups, fit optional charcoal filters over the motor inlet and replace them every 3 to 4 months to absorb cooking odours.
- **Venting Setup Check:** Ensure the top duct spigot connects to your ductwork for external extraction, or keep the front louvres unobstructed for recirculating mode.

CARE & MAINTENANCE GUIDELINES

Painted White Surface Care


Clean external painted surfaces using a soft cloth, warm water, and mild detergent. Avoid abrasive pads, harsh chemical cleaners, or solvent spray on white enamel.

Internal Motor & Fan Housing

Disconnect mains power before cleaning the internal housing. Periodically wipe down motor casing and impeller surfaces with a slightly damp cloth.

SAFETY WARNING: Regular cleaning of grease filters prevents fire hazards. Never leave open gas flames burning beneath the rangehood without cookware in place.

DIMENSIONAL & CLEARANCE SCHEMATIC

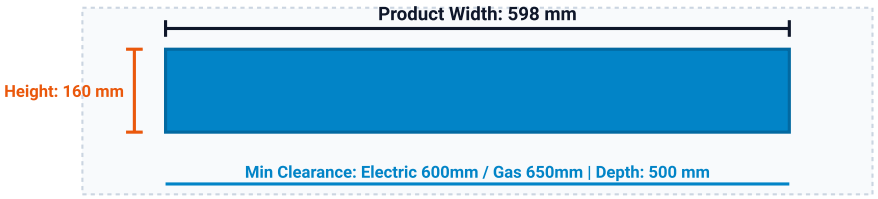

DIMENSIONAL SPECIFICATIONS

MEASUREMENT PARAMETER	DIMENSION (MM)	INSTALLATION & CLEARANCE NOTES
Overall Width	598 mm	Designed to fit standard 600mm cabinetry or wall cavity spacing
Overall Depth	500 mm	Full depth canopy coverage over front and rear cooktop elements
Overall Height	160 mm	Slimline canopy height preserves vertical cabinet storage space
Duct Outlet Diameter	120 mm	Top outlet connects to standard 120mm rigid or flexible ducting
Minimum Clearance (Electric)	600 mm	Measured from highest point of electric heating elements
Minimum Clearance (Gas)	650 mm	Complies with AS/NZS 5601 gas installation clearance standards

INSTALLATION GUIDELINES

- **Cabinet & Wall Securement:** Anchor the hood through top mounting points into cabinet base or attach to rear wall studs using keyhole slots.
- **Ducted Installation:** Connect 120mm rigid or semi-rigid ducting to the top spigot leading directly outside. Minimize duct bends for optimal airflow performance.
- **Recirculating Setup:** For non-ducted installation, fit optional active carbon filters over the motor intake and keep front louvres unobstructed.
- **Electrical Connection:** Plug the fitted 10A power cord into a standard 220–240V socket inside the cabinet or wall cavity.

IMPORTANT COMPLIANCE NOTE: All installation work must strictly comply with national wiring regulations and Australian/New Zealand standards (AS/NZS 5601).