WESTINGHOUSE

PRODUCT FACTSHEET & SPECIFICATION GUIDE

MODEL: WRF613SA

60CM FIXED HIGH-EXTRACTION RANGEHOOD - STAINLESS STEEL

Designed for heavy-duty cooking demands in compact kitchens, the Westinghouse WRF613SA delivers an upgraded 340 m³/h extraction capacity, 3 fan speed settings, energy-efficient LED task lighting, and dishwasher-safe multi-layer aluminum mesh grease filters inside a sleek brushed stainless steel canopy.

340 m³/h	3 Speeds	598 x 500 mm
MAX EXTRACTION CAPACITY	FRONT PUSH BUTTON CONTROL	OVERALL FOOTPRINT

KEY PERFORMANCE FEATURES

High Performance 340 m³/h Airflow

Higher volume centrifugal extraction effectively clears heavy steam, smoke, and cooking fumes from 60cm cooktop surfaces.

Brushed Stainless Steel Finish

Durable stainless steel canopy designed to seamlessly match contemporary kitchen appliances and under-cabinet mounting profile.

Ducted & Recirculating Flexibility

Versatile installation options supporting top 120mm ducting for external venting or front-vented recirculating with optional carbon filters.

Dishwasher Safe Mesh Filters

Multi-layer aluminum mesh grease filters unclip easily for rapid washing by hand or in a standard dishwasher.

TECHNICAL SPECIFICATIONS SUMMARY

FEATURE / PARAMETER	SPECIFICATION DETAILS
Finish & Construction	Brushed Stainless Steel Canopy with Front Recirculation Louvres
Control Interface	Front-Mounted Mechanical 3-Speed Push Button Switches
Acoustic Noise Output	53 dBA (Low Speed) – 65 dBA (Maximum Speed)
Lighting System	Energy Efficient Integrated LED Lamps
Included Accessories	2 x Heavy-Duty Aluminum Mesh Grease Filters + 120mm Duct Collar
Electrical Connection	220–240V 50Hz fitted with 10A Standard Plug & Cord

FIXED RANGEHOOD COMPONENT LAYOUT



OPERATING INSTRUCTIONS

- **Power & Fan Speed Control:** Press the front panel controls to select Speed 1 (low for gentle simmering), Speed 2 (medium for general meal prep), or Speed 3 (high extraction for high-heat wok frying or searing).
- **Cooktop Lighting:** Press the dedicated lamp button to engage the LED cooktop lighting independently of fan operation.
- **Cleaning Grease Filters:** Unclip the multi-layer aluminum mesh filters monthly using the quick-release catch. Clean with warm soapy water or wash on a low-temperature dishwasher cycle.
- **Carbon Filter Maintenance:** For recirculating setups, fit optional carbon filters over the motor housing and replace every 3 to 4 months to ensure continuous odour filtration.
- **Venting Setup Check:** Ensure top ducting is securely attached for external extraction, or ensure front louvres remain unobstructed for recirculating mode.

CARE & MAINTENANCE GUIDELINES

Stainless Steel Outer Body


Clean external stainless steel panels with a soft microfiber cloth and a mild stainless steel polish or warm soapy water. Always wipe gently in the direction of the grain.

Internal Motor & Fan Impeller

Always disconnect power before servicing internal components. Periodically wipe motor housing and impeller blades clean using a damp cloth.

SAFETY WARNING: Regular cleaning of grease filters prevents fire risks. Never leave open gas flames unattended under the rangehood without cookware.

DIMENSIONAL & CLEARANCE SCHEMATIC

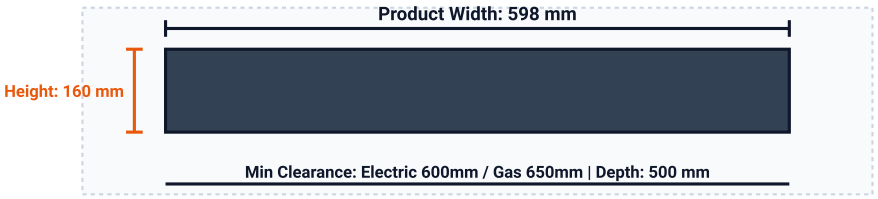

DIMENSIONAL SPECIFICATIONS

MEASUREMENT PARAMETER	DIMENSION (MM)	INSTALLATION & CLEARANCE NOTES
Overall Width	598 mm	Designed to fit standard 600mm overhead cabinetry or cavity spaces
Overall Depth	500 mm	Full canopy depth provides comprehensive coverage over cooktops
Overall Height	160 mm	Slimline canopy height preserves valuable cabinet overhead storage
Duct Outlet Diameter	120 mm	Top outlet connects to standard 120mm rigid or semi-rigid ducting
Minimum Clearance (Electric)	600 mm	Measured from highest point of electric cooktop heating elements
Minimum Clearance (Gas)	650 mm	Complies with AS/NZS 5601 gas installation safety standards

INSTALLATION GUIDELINES

- **Cabinet & Wall Securement:** Fasten the unit through top mounting screw holes into cabinet base or anchor securely into wall studs using rear slots.
- **Ducted Setup:** Connect 120mm ductwork to the top outlet collar leading to an external wall or roof vent. Keep duct length short and straight for optimal 340 m³/h airflow.
- **Recirculating Setup:** For non-ducted applications, install active carbon filters over the motor intake and keep front recirculating louvres clear.
- **Electrical Connection:** Plug the fitted 10A power cord into a standard 220–240V AC power outlet located inside adjacent cabinetry.

IMPORTANT COMPLIANCE NOTE: All installation work must strictly adhere to local electrical building codes and Australian/New Zealand standards (AS/NZS 5601).